

UHF circularly pol downfire antenna 420-470MHz

DESCRIPTION

The S.PAGE is based on the S.3Y yagi, and is specifically designed for in - building RF coverage requirements. The one piece folded dipoles incorporate a d.c. short to minimise static interference. The balun assembly is completely encapsulated in polyurethane resin, totally preventing moisture ingress. These antennas are circular polarised, and fire down for on site coverage.

- Former Skymasts brand product.

SPECIFICATIONS

Electrical	
Frequency	420 - 470 MHz
Max. Input Power	150 W
Polarisation	Circular
3 dB Beamwidth, E-Plane	62 °
3 dB Beamwidth, H-Plane	62 °
Impedance	50 Ω
Gain	6 dBd (8.2 dBi)
VSWR	< 1.5:1
Front-To-Back Ratio	> 15 dB
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
HCM Code(s)	HCM030EB20, 030EB20
Mechanical	
Connection(s)	N(f) on 3m RG213/U cable
Materials	Boom, 32 mm dia. aluminium elements, 12.7 mm dia. aluminium balun, fully moulded enclosure
Length	1000 mm / 39.37 in.
Wind Load	85 N (160km/h)
Weight	1.9 kg / 4.19 lb
Mounting Bracket	3202078/68 + 3201079/00 (Ordered Separately)
Balun Encapsulant	Polyurethane Resin U-600
Alternate Mounting Bracket	0900912/00, 0302032/68, or 0300064/00 + U-Bolts to match mounting pipe diameter (Ordered Separately)
Environmental	
Ingress Protection	IP68


ORDERING

Model	Product No.	Frequency
UHF circularly pol downfire antenna 420-470MHz	S.PAGE-445	420 - 470 MHz
Galvanised steel crossover bracket 32/50mm	0900912/00	
Pressed steel cross clamp 2" x 1-1/4" (JBL73)	0302032/68	
Cast aluminium cross clamp, circular	0300064/00	
M8 x 50mm (2") U-Bolts (1 Pair)	4884036/00	
M8 x 75mm (3") U-Bolts (1 Pair)	4884076/00	
Fixed norstel / coupler clamp (cross clamp)	3202078/68	
Increasing sleeve	3201079/00	



DIAGRAM

RADIATION PATTERNS

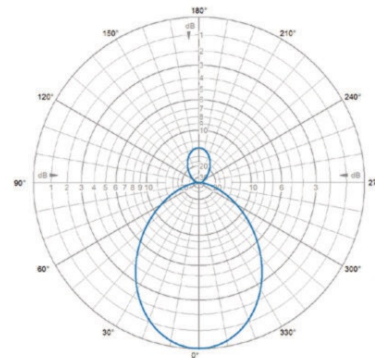

E-Plane | 445 MHz

